


AXIAL TAPE & REEL

Our axial-leaded capacitors can be supplied taped and reeled. A 12 inch leader of tape starts and ends each reel. A layer of 50/60lb. craft paper separates each layer of components, and a layer of corrugated over the last layer protects the content of the reel. Reels are to EIA standards (RS-296E Class I, Level I).

TAPING DIMENSIONS: Units in mm (inches)

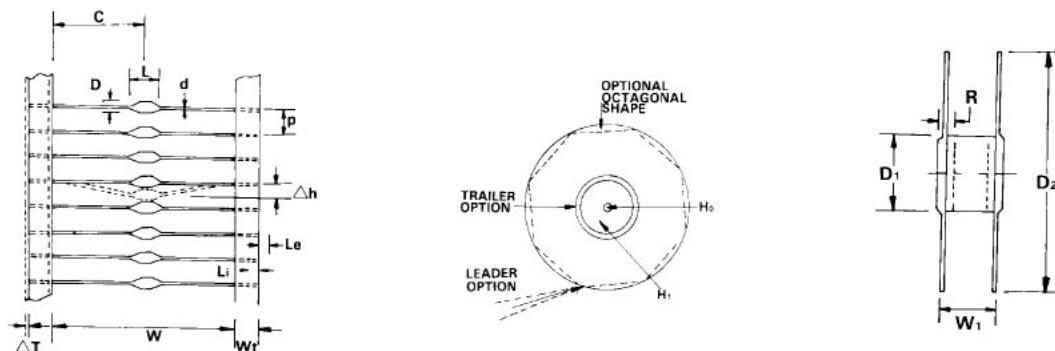

DESCRIPTION	SYMBOL	DIMENSIONS	DESCRIPTION	SYMBOL	DIMENSIONS
Pitch of Component	P	5.08 ± 0.51 (0.200 ± 0.020)	Centered	C	± 0.76 (± 0.030)
Cumulative Tolerance of P over 6 consecutive units		± 0.15 (± 0.0059)	Core diameter	D1	34.90 - 92.10 (1.375 - 3.260)
Tape Width	Wt	6.0 ± 1.0 (0.236 ± 0.039)	Reel diameter	D2	355.60 max (14)
Lead wire protusion	Le	1.57 max (0.062)	Core width	W1	69.85 ± 1.52 (2.750 ± 0.060)
Lead extension into tape	Li	3.96 min (0.156)	Recess depth	R	9.5 min (0.374)
Offset between tapes	ΔT	0.8 max (0.031)	Arbor hole	Ho	15.5 - 18.0 (0.510 - 0.608)
Width between tapes	W	52.37 ± 1.57 (2.06 ± 0.062)	Deflection from nominal position	Δh	1.19 max (0.047)
Pilot hole dia.	H1	8.0 (0.315)	Leader option	L	304.8 min (12)

PACKAGING QUANTITY:

CODE	TAPING TYPE		BULK TYPE
	QUANTITY PER REEL	QUANTITY PER BOX	QUANTITY PER BAG
10	5,000	5,000	500
20	4,000	4,000	500