




## AXIAL-LEADED, EPOXY-COATED MULTILAYER CERAMIC CAPACITORS

### STYLE AND DIMENSIONS


#### FEATURES:

- Epoxy-coated, miniature size
- 50, 100 and 200Vdc
- NPO/COG, X7R, Z5U and Y5V temperature coefficients
- Bulk, and Tape & Reel packaging

#### MONOLITHIC CONSTRUCTION

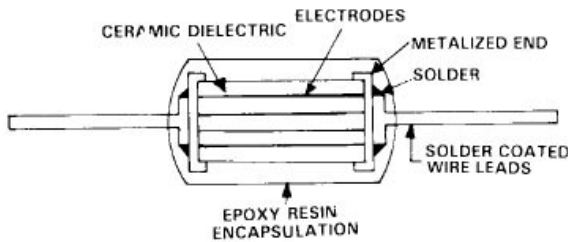

#### CASE SIZE

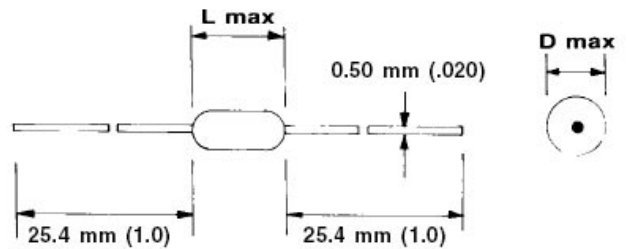


#### SIZE CODE AND DIMENSIONS:

CODE	L)	D	LEAD DIAMETER	LEAD LENGHT
10	3.81mm (0.150") Max.	2.54mm (0.100") Max.	0.50mm (0.020")	25.4mm (1.00")
20	5.08mm (0.200") Max.	3.18mm (0.125") Max.	0.50mm (0.020")	25.4mm (1.00")

#### MARKING:

#### TOLERANCE CODE:

CODE	TOLERAN
J	± 5%
K	± 10%
M	± 20%
Z	+80 /- 20%

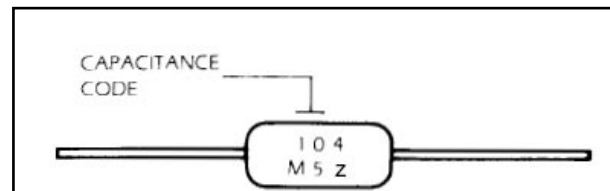

#### RATED VOLTAGE CODE:

CODE	VOLTAGE
2	25V DC
5	50V DC
A	100V DC
B	200V DC

#### DIELECTRIC CODE:

CODE	DIELECTRIC	CODE	DIELECTRIC
N	NPO/COG(1B)	Z	Z5U(2E6)
X	X7R(2R1)	Y	Y5V(2F4)

#### SIZE CODE

CODE	CAPACITANCE	TOLERANCE	RATED VOLTAGE	TEMP. CHAR.
10	✓	-	-	-
20	✓	✓	✓	✓